

MINI SCISSOR LIFTS

Easy UP 5 Picking

INDOOR USE


STANDARD EQUIPMENT

- 2WD traction, DC electric motors and electromagnetic brakes
- Swivel caster interlock for straight line driving
- Selector for 3 different proportional speed
- Non marking tires
- Double material tray, non-slip, adjustable and fixed
- Double door access gate with spring-lock
- Control box on platform IP65, with proportional joystick and emergency stop
- Ground control panel with key switch
- Inclinometer with audible/visual alarm and motion cut out
- Load sensor with audible/visual alarm and motion cut out
- Electrical scissor protection
- Pothole protection
- Audible motion alarm, horn and flashing beacon
- Low battery alert
- Battery charger with automatic switch-off
- Manual emergency lowering device
- Cylinder holding valve



Large material tray, non-slip, adjustable in 8 positions.

	EASY UP 5 PICKING
Number of scissors	3
A	mm 3200
B	mm 5200
C	mm 25
D	mm 1820
E	mm 710
Platform dimensions	mm 700x620
Material tray dimensions	kW 500x620
Platform capacity (including 1 person)	kg 120
Material tray capacity	kg 80
Total capacity (including 1 person)	kg 200
Electric motor (power pack)	kW 2
Electric drive motors	V/kW 24/1
Battery	V/Ah 2 x 12/105
Battery charger	V 230
Oil tank capacity	Lt. 2
Lifting time	s 17/20
Max side/longitudinal tilt angle	degrees 1,5/2,5
Gradeability	% 25
Traction speed	km/h 0 - 4
Safety traction speed	km/h 0,6
Internal turning radius	m 0
External turning radius	m 1,25
Total weight	kg 585

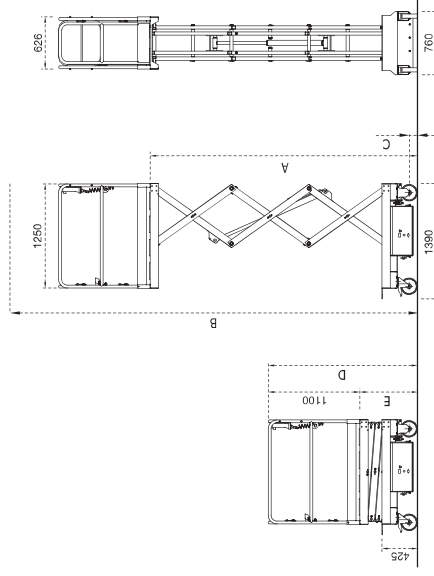


MINI SCISSOR LIFTS

Easy UP 5 SP

INDOOR AND OUTDOOR USE

STANDARD EQUIPMENT

- Manual emergency lowering device
- Battery charger with automatic switch-off
- Low battery alert
- Battery switch-off
- Inclinometer with cut out and alarm
- Load sensor with audible/visual motion cut out and alarm
- Electrical scissor protection
- Non marking tires
- Cylinder holding valve
- Non-slip deck surface
- Full height access gate with spring-lock
- 2WD traction, DC electric motors
- Electromagnetic brakes on the 2WD
- Swivel caster interlock for straight line driving
- Pothole protection
- Control box on platform IP65, with proportional joystick and emergency stop
- Selector for 3 different proportional speed
- Audible motion alarm
- Horn
- Ground control panel with key switch
- Flashing beacon

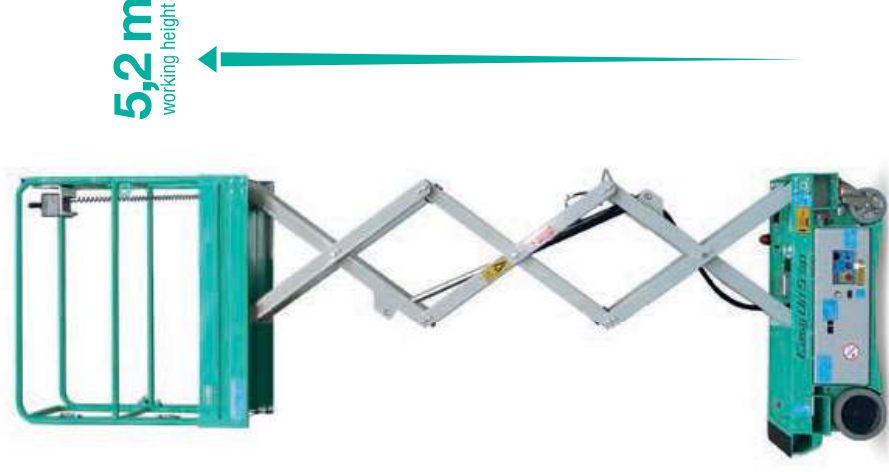

	EASY UP 5 SP
Number of scissors	3
A	mm 3200
B	mm 5200
C	mm 25
D	mm 1810
E	mm 710
Capacity (including 1 person)	kg 200
Electric motor (power pack)	kW 2
Electric drive motors	V/kW 24/1
Battery	V/Ah 2 x 12/105
Battery charger	V 230
Oil tank capacity	Lt. 2
Lifting time	s 17/20
Max side/longitudinal tilt angle	degrees 1,5/2,5
Gradeability	% 25
Traction speed	Km/h 0-4
Safety traction speed	Km/h 0,6
Internal turning radius	m 0
External turning radius	m 1,25
Total weight	Kg 500

